
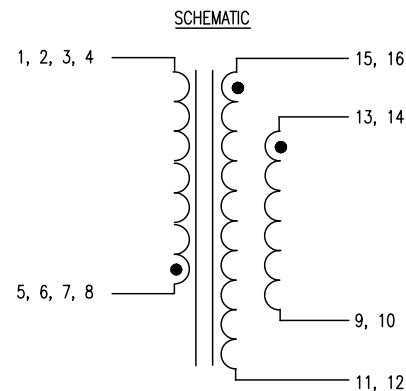
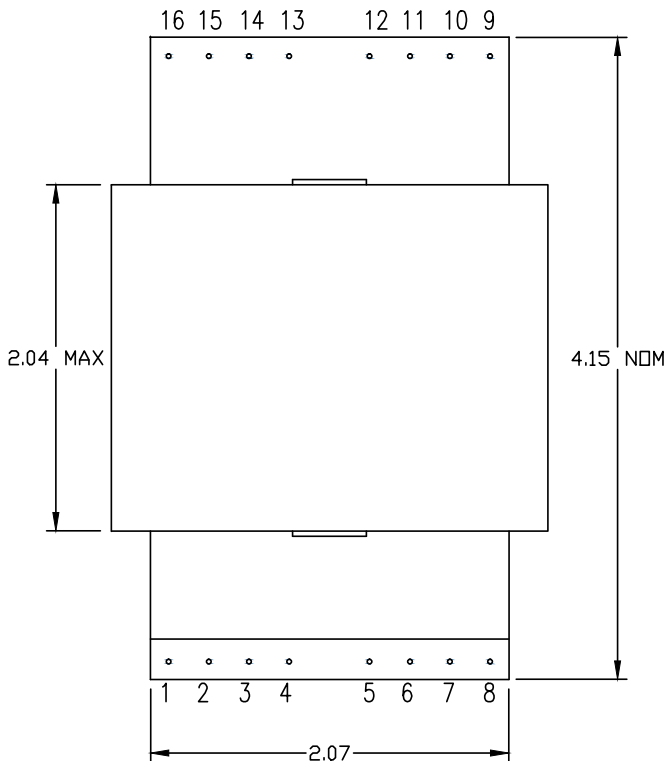
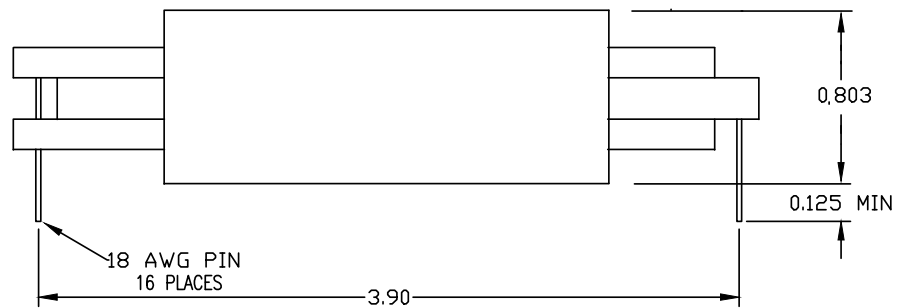


LOW PROFILE 1000W PLANAR TRANSFORMER TX6005

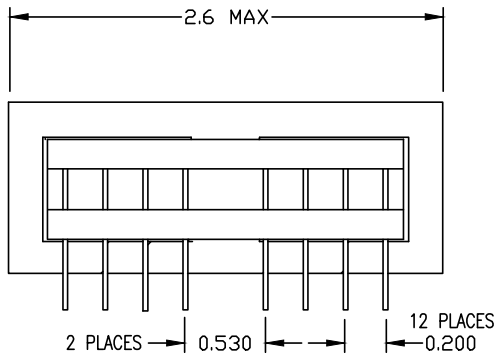

ELECTRICAL SPECIFICATIONS:

1.0 TURNS RATIO: 1V 10 KHz

$$\frac{15,16 - 11,12}{1,2,3,4 - 5,6,7,8} : 1.63 \text{ TO } 1.71$$

$$\frac{13,14 - 9,10}{1,2,3,4 - 5,6,7,8} : 1.63 \text{ TO } 1.71$$

2.0 INDUCTANCE: 0.1V 10 KHz

$$1,2,3,4 - 5,6,7,8 : 98 \text{ uH MIN.}$$

3.0 D.C. RESISTANCE: 25 C

$$1,2,3,4 - 5,6,7,8 : 0.006 \text{ OHMS MAX}$$

$$15,16 - 11,12 : 0.020 \text{ OHMS NOM}$$

$$13,14 - 9,10 : 0.020 \text{ OHMS NOM}$$

4.0 LEAKAGE INDUCTANCE: 0.1V 1 MHz

$$1,2,3,4 - 5,6,7,8 : 100 \text{ nH MAX.}$$

$$\text{WITH } 9,19,11,12,13,14,15,16 \text{ SH}$$

STANDARD DIMENSION TOLERANCE (INCHES)

.x	
.xx	±0.02
.xx	±0.005