


PUSH-PULL TRANSFORMER

TX3004


Electrical Specifications@25°C

1. Turns Ratio@15.75 kHz, 0.5V
 10-6:1-5=10.33: 1±2%
 10-8:8-6=1:1±2%
2. DC Resistance(20°C):
 1-3 & 3-5 = 0.020 Ω Max.
 10-8 & 8-6 = 2.55 Ω Max.
3. Inductance@100 kHz, 0.1V
 1-3&3-5: 6.8 μHMin
4. Hi-Pot:(1,3,5) to (10,8,6)
 500VDC, 0.5mA, 1Sec

Mechanical

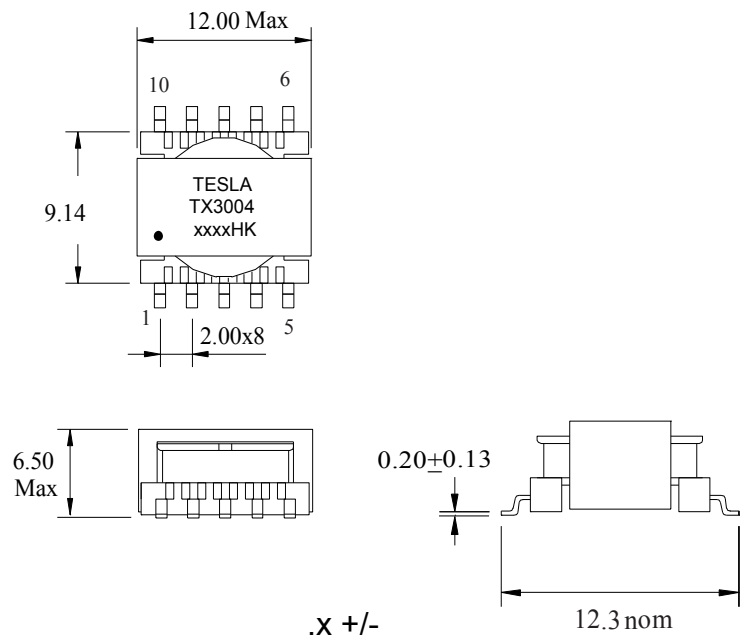

Schematic

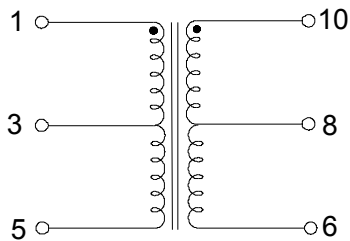

.x +/-
 .xx+/- 0.25
 .xxx+/- 0.10