



TE9000 Ethernet to Coaxial Converter




Features:


- Designed as passive non-PoE adaptor. No power required.
- Bidirectional design. Can operate as transmitter or receiver.
- Used for 10/100 BaseT Ethernet communication via existing 75Ω Coaxial Cable
- Class B Insulation System
- Operating Temperature: 0°C to +85°C
- Storage Temperature: 0°C to +85°C



Dimensions

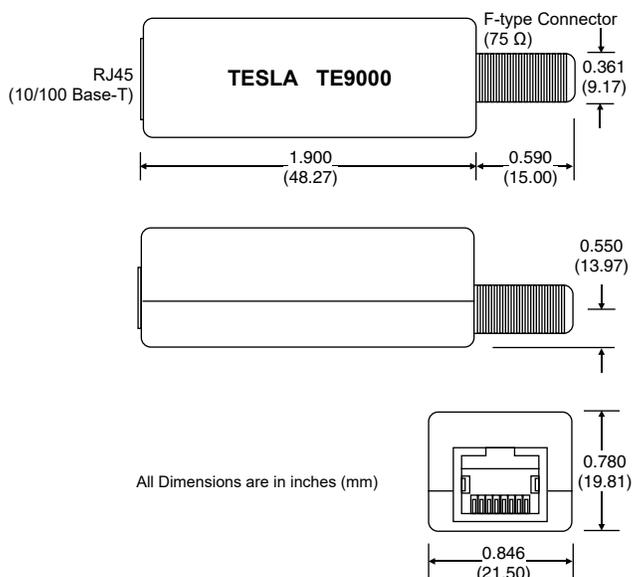

Transmission Distance⁽¹⁾

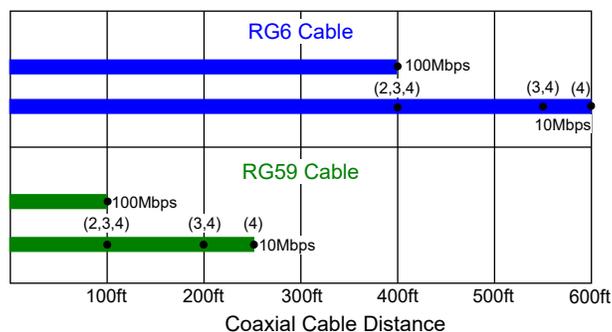

- (1) Actual transmission distance will vary based on the equipment used, coaxial cable grade and mode of data transmission.
- (2) Auto Negotiation mode
- (3) Manual Full Duplex mode
- (4) Manual Half Duplex mode

Typical Application

